

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 May 2001 (17.05.2001)

PCT

(10) International Publication Number
WO 01/34397 A1

(51) International Patent Classification⁷: **B41F 21/12, 13/008**

(21) International Application Number: **PCT/IL99/00600**

(22) International Filing Date:
7 November 1999 (07.11.1999)

(25) Filing Language: **English**

(26) Publication Language: **English**

(71) Applicant (for all designated States except US): **INDIGO N.V. [NL/NL]; Limburglaan Street 5, NL-6221 SH Maas-tricht (NL).**

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SHMAISER, Aron [IL/IL]; Hameshoreret Rachel Street 60, 75734 Rishon Lezion (IL). SAGI, Daniel [IL/IL]; Nachmias Street 7, 74058 Nes-Ziona (IL). LEWINTZ, Lior [IL/IL]; Shoham Street 32/2, 69359 Tel Aviv (IL).**

(74) Agents: **FENSTER, Paul et al.; Fenster & Company Patent Attorneys, Ltd., P. O. Box 10256, 49002 Petach Tikva (IL).**

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **TANDEM PRINTING SYSTEM WITH FINE PAPER-POSITION CORRECTION**

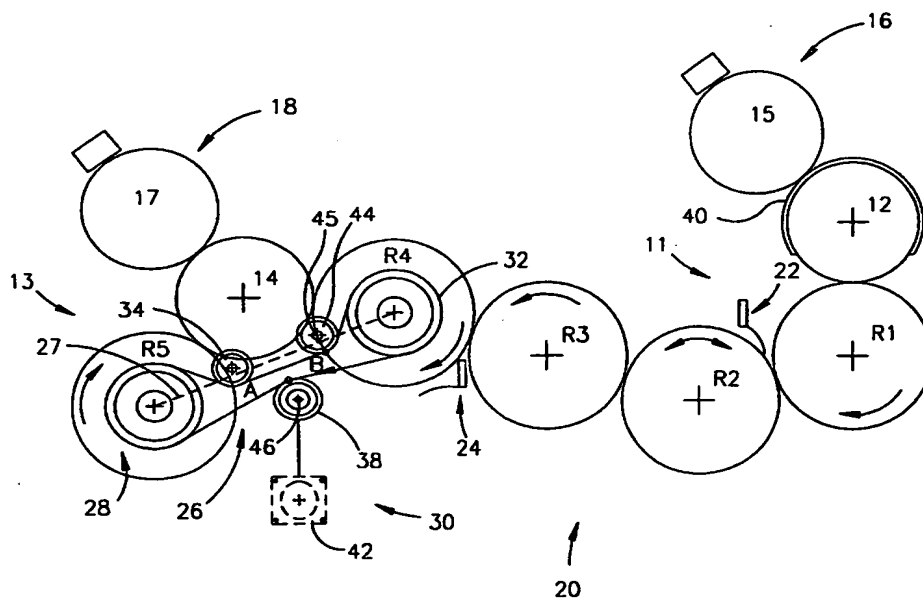

(57) Abstract: A tandem printer with a mechanism for fine substrate-position correction, comprising: a first printing station; a second printing station; a rotatable element, rotating at a given rotation rate, that receives the substrate after printing thereon by the first printing station and transfers the substrate toward the second printing station; a sensor which measures the position of an edge of the substrate during its transfer from the first printing station to the second printing station; and a controller, which applies a corrective step change in angular position of the rotatable element responsive to the measurements of the sensor, without changing the general rotation rate of the rotatable element.